

Hooking into the EFT Manufacturing OI from TestStand

The EFT Manufacturing OI has many hooks available from TestStand to provide operator feedback. This article describes the process for creating test steps that that allow test sequences to update the EFT Manufacturing OI:


- Set and Execution message to be displayed to the operator
- Set progress bar percentage and text
- Display an image to the operator

- OI Control Items
 - Progress Bar Percent
 - Progress Text
 - Execution Image
 - Execution Message
- Using Expressions and TestStand ActiveX Interfaces
- EFT OI Interface StepType


OI Control Items

Each OI control item is set by sending a TestStand User Interface Message (PostUIMessageEx method)


Progress Bar Percent

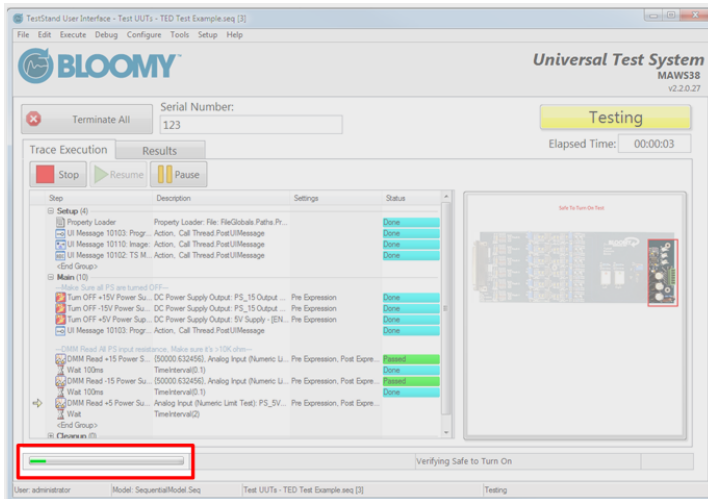

Progress Text

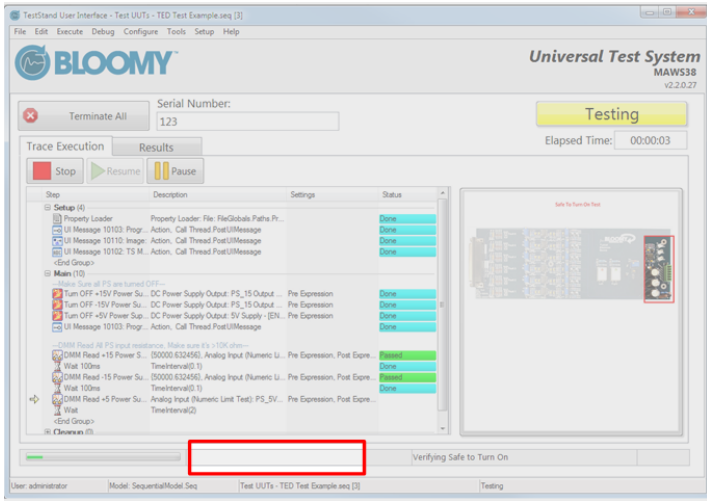


Execution Image

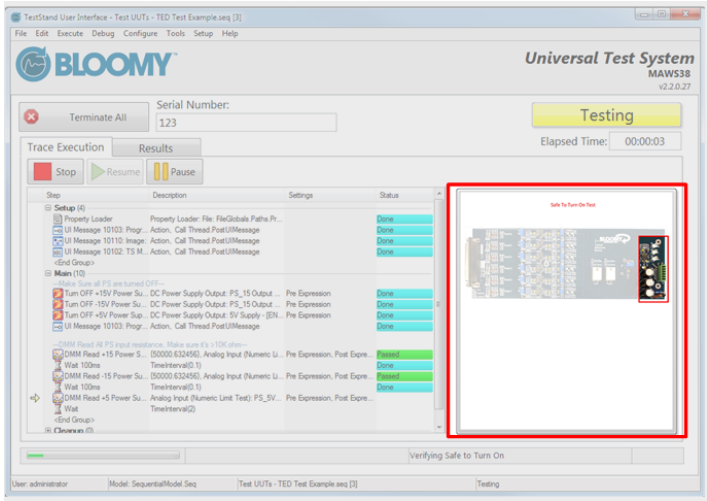


Execution Message

Can be black, blinking, bold red, or bold green

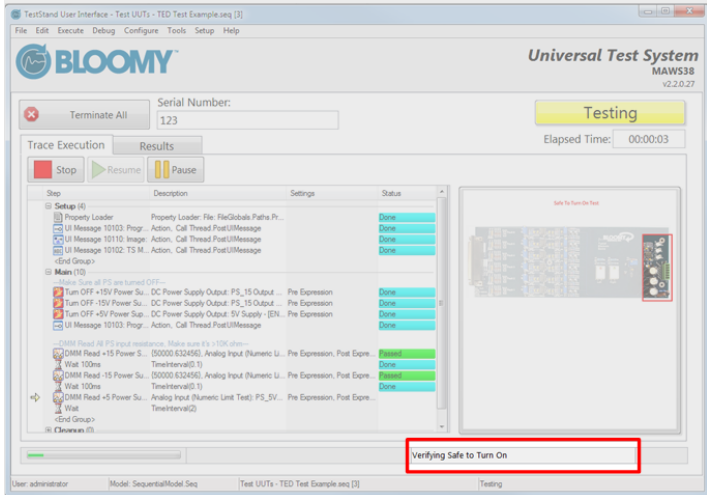

Using Expressions and TestStand ActiveX Interfaces

The TED Test.seq shipping example provides a utility subsequence, called "__UI Interface Utilities__" which provides several examples for how to send the appropriate UI messages to the UI, using either ActiveX adapters or through expressions (which can be copied into pre- or post-expressions of other steps).

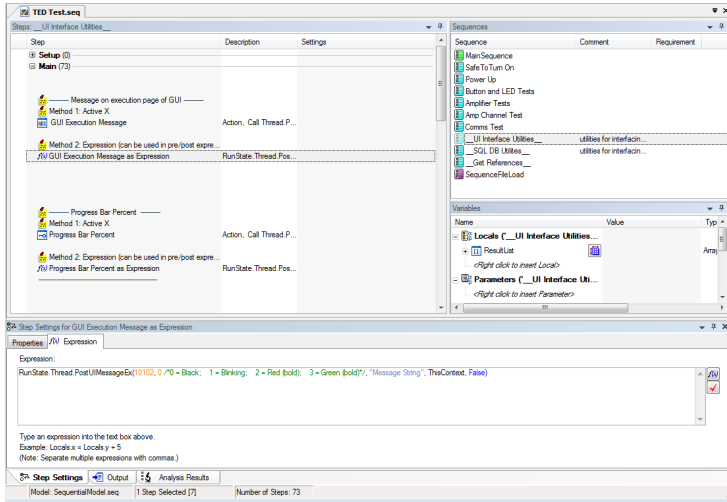


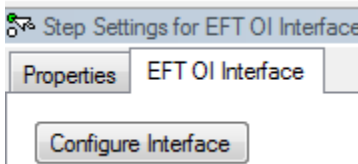
EFT OI Interface StepType

EFT OI Interface StepTypes Installer
EFT OI Interface StepTypes v1_0.EXE

The EFT OI Interface StepType provides a more intuitive way to control the OI through TestStand.

To use the step type:

1. Drag the EFT OI Interface StepType into your sequence 
2. Click "Configure Interface" on the step settings tab



3. Select the message to send from the dropdown box

